



TM

ARCHITECTURAL LIGHTING CATALOGUE

Precision in Design.
Perfection in **Light.**

JULY 2026



INDUSTRIAL
LIGHTING



RESIDENTIAL
LIGHTING



COMMERCIAL
LIGHTING

ABOUT US

BRIGHTENING SPACES.
ENRICHING LIVES.

At Glaron, we believe light is more than just brightness – it's an experience. Our mission is to deliver innovative, high-quality and energy-efficient lighting solutions that transform spaces and create the perfect ambiance.



QUALITY

Premium materials and rigorous quality standards.



INNOVATION

Continuously evolving products with modern technology.



EFFICIENCY

Energy-efficient solutions for a brighter and sustainable future.



TRUST

Building long-term relationships through reliability and support.

“

WE DON'T JUST
MAKE LIGHTS,
WE CREATE
EXPERIENCES.



INDUSTRIAL
LIGHTING



RESIDENTIAL
LIGHTING



COMMERCIAL
LIGHTING

TABLE OF CONTENTS

01		COB LIGHTINGS	04 - 15
02		DOWNLIGHTS	16 - 18
03		TRACK & CYLINDER LIGHTS	19 - 21
04		LED PANEL SLIM & SURFACE	22 - 23
05		STRIP , ROPE LIGHTS, PROFILE	24 - 27
06		OUTDOOR LIGHTS & SOLAR	27 - 35
07		GATE LIGHTS & BOLLARDS	36 - 41

Delta



TECHNICAL SPECIFICATIONS

- Wattage 7W / 12W / 18W
- Dimension 63×61 mm / 82×79 mm / 90×88 mm
- Cut Out 50 mm / 72 mm / 78 mm
- CCT (K) WW / NW / CW
- Tunable/Dimmable Available
- Beam Angle 24° / 38° / 38°
- CRI (Ra) > 80
- Material Aluminium Die-Casting
- Body Color BK / WH
- Reflector N/A

Curve

TECHNICAL SPECIFICATIONS

- Wattage 7W / 12W / 18W
- Dimension 73×61 mm / 85×67 mm / 93×73 mm
- Cut Out 65 mm / 75 mm / 85 mm
- CCT (K) WW / NW / CW
- Tunable/Dimmable Available
- Beam Angle 24° / 24° / 24°
- CRI (Ra) >80
- Material Aluminium Die-Casting
- Body Color BK / WH
- Reflector Glossy Black / Rosegold / Matt White / Matt Black



Gem



TECHNICAL SPECIFICATIONS

- Wattage 7W / 12W / 18W
- Dimension 73×61 mm / 85×67 mm / 93×73 mm
- Cut Out 65 mm / 75 mm / 85 mm
- CCT (K) WW / NW / CW
- Tunable/Dimmable Available
- Beam Angle 24° / 38° / 38°
- CRI (Ra) >80
- Material Aluminium Die-Casting
- Body Color BK / WH
- Reflector Glossy Black / Rosegold

Glare

TECHNICAL SPECIFICATIONS

- Wattage 7W / 12W
- Dimension 55 × 55 × 60 mm / 55 × 55 × 70 mm
- Cut Out 50 mm
- CCT (K) WW / NW / CW
- Tunable/Dimmable N/A
- Beam Angle 38°
- CRI (Ra) >80
- Material Aluminium Die-Casting
- Body Color MW / MB / RG / SILVER / GB
- Reflector N/A



Delta Pro

TECHNICAL SPECIFICATIONS



- Wattage 7W / 12W / 18W
- Dimension 75 × 60 mm / 85 × 76 mm / 95 × 100 mm
- Cut Out 65 mm / 75 mm / 85 mm
- CCT (K) WW / NW / CW
- Tunable/Dimmable Available
- Beam Angle 24° / 38°
- CRI (Ra) >80
- Material Aluminium Die-casting
- Body Color BK / WH
- Reflector GBK / RGD / GD / CH

Vogue

TECHNICAL SPECIFICATIONS

- Wattage 7W / 12W
- Dimension 42 × 42 × 60 mm / 62 × 62 × 60 mm
- Cut Out 35 mm / 55 mm
- CCT (K) WW / NW / CW
- Tunable/Dimmable Available
- Beam Angle 36°
- CRI (Ra) >80
- Material Aluminium Die-casting
- Body Color MW / MB
- Reflector N/A



Glön



TECHNICAL SPECIFICATIONS

- Wattage 7W / 12W / 18W
- Dimension 63 × 43 mm / 80 × 44 mm / 94 × 51 mm
- Cut Out 55 mm / 75 mm / 85 mm
- CCT (K) WW / NW / CW
- Tunable/Dimmable Available
- Beam Angle 24° / 38° / 38°
- CRI (Ra) >80
- Material Aluminium Die-casting
- Body Color MW / MB / RG / GBK / ANTIQUE BRASS
- Reflector N/A

Elegance

TECHNICAL SPECIFICATIONS

- Wattage 7W / 12W / 18W
- Dimension 68 × 66 mm / 83 × 75 mm / 93 × 85 mm
- Cut Out 60 mm / 75 mm / 85 mm
- CCT (K) WW / NW / CW
- Tunable/Dimmable Available
- Beam Angle 24° / 38° / 38°
- CRI (Ra) >80
- Material Aluminium Die-casting
- Body Color WH / BK
- Reflector N/A



Orbit



TECHNICAL SPECIFICATIONS

• Wattage	7W / 12W / 18W
• Dimension	63 × 32 mm / 80 × 40 mm / 95 × 40 mm
• Cut Out	60 mm / 75 mm / 85 mm
• CCT (K)	WW / NW / CW
• Tunable/Dimmable	Available
• Beam Angle	24° / 38°
• CRI (Ra)	>80
• Material	Aluminium Die-casting
• Body Color	WH / BK
• Reflector	N/A

Prism

TECHNICAL SPECIFICATIONS

• Wattage	7W / 12W / 18W
• Dimension	68 × 48 mm / 83 × 55 mm / 93 × 60 mm
• Cut Out	60 mm / 75 mm / 85 mm
• CCT (K)	WW / NW / CW
• Tunable/Dimmable	Available
• Beam Angle	24° / 38°
• CRI (Ra)	>80
• Material	Aluminium Die-casting
• Body Color	BK / WH
• Reflector	RGD / GBK



Pluto



TECHNICAL SPECIFICATIONS

Wattage	7W / 12W / 18W
Dimension	43 × 65 mm / 63 × 94 mm / 83 × 103 mm
Cut Out	35 mm / 55 mm / 75 mm
CCT (K)	WW / NW / CW
Tunable/Dimmable	Available
Beam Angle	38°
CRI (Ra)	>80
Material	Aluminium Die-casting
Body Color	WH / BK
Reflector	N/A

Nivo

TECHNICAL SPECIFICATIONS

• Wattage	8W / 12W / 15W
• Dimension	63 × 78 mm / 73 × 80 mm / 83 × 81 mm
• Cut Out	55 mm / 65 mm / 75 mm
• CCT (K)	WW / NW / CW
• Tunable/Dimmable	Available
• Beam Angle	38°
• CRI (Ra)	>80
• Material	Aluminium Die-casting
• Body Color	BK / WH
• Reflector	N/A



Tera



TECHNICAL SPECIFICATIONS

Wattage	7W / 10W / 12W / 15W
Dimension	52 × 71 mm / 62 × 80 mm / 72 × 90 mm / 82 × 90 mm
Cut Out	45 mm / 55 mm / 65 mm / 75 mm
CCT (K)	WW / NW / CW
Tunable/Dimmable	Available
Beam Angle	38°
CRI (Ra)	>80
Material	Aluminium Die-casting
Body Color	WH / BK
Reflector	N/A

Mirage

TECHNICAL SPECIFICATIONS

• Wattage	7W / 12W / 18W
• Dimension	35 × 75 mm / 45 × 90 mm / 55 × 120 mm
• Cut Out	30 mm / 40 mm / 50 mm
• CCT (K)	WW / NW / CW
• Tunable/Dimmable	Available
• Beam Angle	38°
• CRI (Ra)	>80
• Material	Aluminium Die-casting
• Body Color	MW / MB / SATIN BLACK
• Reflector	N/A



Aero

TECHNICAL SPECIFICATIONS



Wattage	7W / 12W / 18W
Dimension	62 × 80 mm / 72 × 80 mm / 82 × 80 mm
Cut Out	57 mm / 67 mm / 77 mm
CCT (K)	WW / NW / CW
Tunable/Dimmable	Available
Beam Angle	38°
CRI (Ra)	>80
Material	Aluminium Die-casting
Body Color	MW / MB / SATIN BLACK / BRASS
Reflector	N/A

Cresta

TECHNICAL SPECIFICATIONS

• Wattage	7W / 12W / 18W
• Dimension	50 x 60 mm / 55 x 70 mm / 70 × 90 mm
• Cut Out	55 mm / 70 mm / 80 mm
• CCT (K)	WW / NW / CW
• Tunable/Dimmable	Available
• Beam Angle	38°
• CRI (Ra)	>80
• Material	Aluminium Die-casting
• Body Color	MW / MB
• Reflector	N/A



Galaxy



TECHNICAL SPECIFICATIONS

Wattage	7W / 12W / 18W
Dimension	39 × 52 mm / 60 × 63 mm / 80 × 73 mm
Cut Out	35 mm / 55 mm / 75 mm
CCT (K)	WW / NW / CW
Tunable/Dimmable	Available
Beam Angle	38°
CRI (Ra)	>80
Material	Aluminium Die-casting
Body Color	MW / MB / WH+GREY / GD/GB
Reflector	N/A

Spot

TECHNICAL SPECIFICATIONS

- Wattage 1W / 2W / 3W
- Dimension 30*30mm / 42*42mm / 38*28mm
- Cut Out 25 mm / 32 mm / 28 mm
- CCT (K) WW / NW / CW
- Tunable/Dimmable N/A
- Beam Angle 120° / 38°
- CRI (Ra) >80
- Material Polycarbonate / Aluminium Die-casting
- Body Color WH / BK / RG
- Reflector N/A



Linea



TECHNICAL SPECIFICATIONS

- Wattage 6W / 8W / 10W / 12W / 20W
- Dimension 68 × 45mm / 95 × 45mm / 144 × 41mm / 146 × 45mm / 276 × 41mm
- Cut Out 58 × 35 mm / 85 × 35 mm / 138 × 35mm / 137 × 35 mm / 272 × 35mm
- CCT (K) WW / NW / CW
- Tunable/Dimmable N/A
- Beam Angle 24°
- CRI (Ra) >80
- Material Aluminium Die-casting
- Body Color PKW / BK
- Reflector MW / MB / RG / GB

TECHNICAL SPECIFICATIONS

- Wattage 12W / 24W
- Dimension 135 x 35 x 55 mm / 270 x 35 x 55 mm
- Cut Out N/A
- CCT (K) WW / NW / CW
- Tunable/Dimmable N/A
- Beam Angle 24°
- CRI (Ra) >80
- Material Aluminium Die-casting
- Body Color PKW/ BK
- Reflector MW / MB

Linea – S



Duo



TECHNICAL SPECIFICATIONS

- Wattage 2×7W / 2×15W
- Dimension 65 x 122 MM / 85 x 162mm
- Cut Out 113×55mm / 153×75mm
- CCT (K) WW / NW / CW
- Tunable/Dimmable N/A
- Beam Angle 36°
- CRI (Ra) >80
- Material Aluminium Die-casting
- Body Color BK / WH
- Reflector N/A

Duo R

TECHNICAL SPECIFICATIONS

- Wattage 2*7W / 2*12W
- Dimension 68 x 134mm / 85 x 170mm
- Cut Out 55 x 122mm / 75 x 160mm
- CCT (K) WW / NW / CW
- Tunable/Dimmable N/A
- Beam Angle 36°
- CRI (Ra) >80
- Material Aluminium Die-casting
- Body Color BK / WH
- Reflector GBK / RG / WH



Movable



TECHNICAL SPECIFICATIONS

- Wattage 7W / 12W / 18W / 24W / 30W / 50W
- Dimension 85×40 mm / 108×50 mm / 135×80 mm / 150×100 mm
- Cut Out 80 mm / 100 mm / 120 mm / 132 mm
- CCT (K) WW / NW / CW
- Tunable/Dimmable Available
- Beam Angle 24° / 38° / 38° / 55° / 55° / 55°
- CRI (Ra) >80
- Material Aluminium Die-casting
- Body Color WH
- Reflector N/A

TECHNICAL SPECIFICATIONS

- Wattage 7W / 12W / 2 x 7W / 2 x 12W
- Dimension 62x93 mm / 84x104 mm / 140x93mm / 194x104 mm
- Cut Out 55 / 75 / 126x65 / 177x88 mm
- CCT (K) WW / NW / CW
- Tunable/Dimmable Yes
- Beam Angle 24° / 38°
- CRI (Ra) >80
- Material Aluminium Die-casting
- Body Color BK / WH
- Reflector MB
- Shape Round/Square

Pull Out



Downlight

TECHNICAL SPECIFICATIONS

- Wattage 12W / 18W / 24W
- Dimension 120 mm / 155 mm / 175 mm
- Cut Out 110 mm / 145 mm / 170 mm
- CCT (K) WW / NW / CW
- Tunable/Dimmable Available
- Beam Angle 120°
- CRI (Ra) >80
- Material Aluminium Die-casting
- Body Color BK / WH
- Shape Square / Round



Nexus Pro

TECHNICAL SPECIFICATIONS

- Wattage 7W / 12W / 18W / 24W
- Dimension 80x50 / 105x48 mm / 125x56 mm / 155x62 mm
- Cut Out 75 mm / 95 mm / 115 mm / 145 mm
- CCT (K) WW / NW / CW
- Tunable/Dimmable Available
- Beam Angle 120°
- CRI (Ra) >80
- Material Aluminium Die-casting
- Body Color WH / BK
- Reflector WH/ SB / RG / MB /MW



Nexus-S



TECHNICAL SPECIFICATIONS

- Wattage 12W / 18W / 24W
- Dimension 92 × 75mm / 122 × 75mm / 142 × 75mm
- Cut Out N/A
- CCT (K) WW / NW / CW
- Tunable/Dimmable N/A
- Beam Angle 120°
- CRI (Ra) >80
- Material Aluminium Die-casting
- Body Color PKW / BK
- Reflector WH / SB / RG / MB / MW

TECHNICAL SPECIFICATIONS

- Wattage 7W / 12W / 18W / 24W
- Dimension 51 × 45mm / 80 × 46mm / 90 × 48mm / 128 × 50mm
- Cut Out N/A
- CCT (K) WW / NW / CW
- Tunable/Dimmable N/A
- Beam Angle 120°
- CRI (Ra) >80
- Material Aluminium Die-casting
- Body Color PKW / BK

Nova



Concealed



TECHNICAL SPECIFICATIONS

- Wattage 7W
- Dimension 108×53 mm
- Cut Out 70 mm
- CCT (K) WW/NW/WH/BBLUE/PINK / 3 in 1
- Tunable/Dimmable N/A
- Beam Angle 120°
- CRI (Ra) >80
- Material Polycarbonate
- Body Color WH
- Reflector N/A

Luxe

TECHNICAL SPECIFICATIONS

- Wattage 7W
- Dimension 108×53 mm
- Cut Out 70 mm
- CCT (K) WW / NW
- Tunable/Dimmable N/A
- Beam Angle 38°
- CRI (Ra) >80
- Material Polycarbonate
- Body Color WH
- Reflector RGD



Tracklight



TECHNICAL SPECIFICATIONS

- Wattage 10W / 20W / 30W
- Dimension 50×125 mm / 65×150 mm / 75×180 mm
- Cut Out N/A
- CCT (K) WW / NW / CW
- Tunable/Dimmable N/A
- Beam Angle 60°
- CRI (Ra) >80
- Material Aluminium Die-casting
- Body Color BK / WH
- Track channel 1M / 2M

Track Wall

TECHNICAL SPECIFICATIONS

- Wattage 10W / 20W / 30W
- Dimension 30× 110 mm / 50 × 120 mm / 75 × 180 mm
- Cut Out N/A
- CCT (K) WW / NW / CW
- Tunable/Dimmable N/A
- Beam Angle 60°
- CRI (Ra) >80
- Material Aluminium Die-casting
- Body Color BK / WH
- Reflector N/A



Streak



TECHNICAL SPECIFICATIONS

• Wattage	7W
• Dimension	35 × 35 × 120 mm
• Cut Out	N/A
• CCT (K)	WW / NW / CW
• Tunable/Dimmable	N/A
• Beam Angle	38°
• CRI (Ra)	>80
• Material	Aluminium Die-casting
• Body Color	BK / WH
• Reflector	N/A

Movable Cylinder

TECHNICAL SPECIFICATIONS

• Wattage	7W / 12W / 18W
• Dimension	63 × 92 mm / 74 × 98 mm / 83 × 105 mm
• Cut Out	N/A
• CCT (K)	WW / NW / CW
• Tunable/Dimmable	N/A
• Beam Angle	24° / 36° / 36°
• CRI (Ra)	>80
• Material	Aluminium Die-casting
• Body Color	BK / WH
• Reflector	GBK / RGD / WH



Cylinder



TECHNICAL SPECIFICATIONS

- Wattage 7W / 12W / 18W
- Dimension 60×70mm / 73×85mm / 87×100mm
- Cut Out N/A
- CCT (K) WW / NW / CW
- Tunable/Dimmable N/A
- Beam Angle 36°
- CRI (Ra) >80
- Material Aluminium Die-casting
- Body Color BK / WH
- Reflector MB / MW / GBK / RG

Magna

TECHNICAL SPECIFICATIONS

- Wattage 10W / 15W
- Dimension 85 × 85 × 65 mm / 75 × 75 × 70 mm
- Cut Out N/A
- CCT (K) WW / NW / CW
- Tunable/Dimmable N/A
- Beam Angle 36°
- CRI (Ra) >80
- Material Aluminium Die-casting
- Body Color Black / Brass gold / Mesh Black
- Reflector RGD / GBK



Striker




TECHNICAL SPECIFICATIONS

- | | |
|--------------------|----------------------------|
| • Wattage | 5W / 3W |
| • Dimension | 58×14 mm / 62×18 mm |
| • Cut Out | N/A |
| • CCT (K) | WW |
| • Tunable/Dimmable | No |
| • Beam Angle | 120° |
| • CRI (Ra) | >80 |
| • Material | Aluminium Die-casting / PC |
| • Body Color | BK / WH |
| • Reflector | N/A |

Slim Panel

TECHNICAL SPECIFICATIONS

- | | |
|--------------------|--------------------------|
| • Wattage | 8W / 15W / 22W |
| • Dimension | 120 mm / 170 mm / 225 mm |
| • Cut Out | 105 mm / 155 mm / 205 mm |
| • CCT (K) | WW / NW / CW |
| • Tunable/Dimmable | Yes |
| • Beam Angle | 120° |
| • CRI (Ra) | >80 |
| • Material | Aluminium Die-casting |
| • Body Color | WH |
| • Shape | Round / Square |

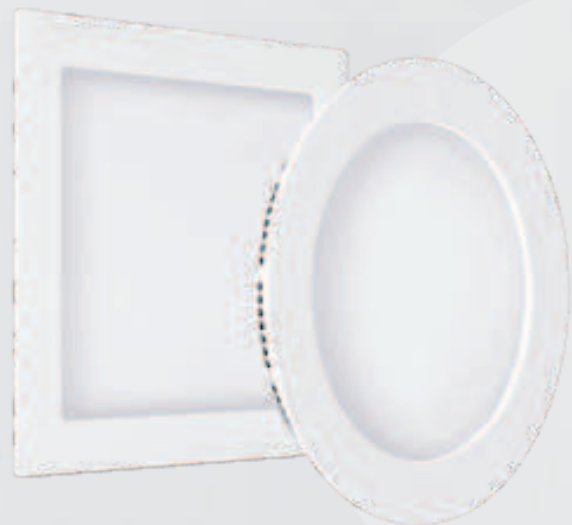

Surface

TECHNICAL SPECIFICATIONS

- Wattage 8W / 15W / 22W
- Dimension 120 mm / 170 mm / 225 mm
- Cut Out N/A
- CCT (K) WW / NW / CW
- Tunable/Dimmable Yes
- Beam Angle 120°
- CRI (Ra) >80
- Material Aluminium Die-casting
- Body Color WH
- Reflector N/A



Trimless Surface

TECHNICAL SPECIFICATIONS

- Wattage 12W / 18W / 20W / 24W
- Dimension 120 mm / 120mm / 150 mm / 170mm
- Cut Out N/A
- CCT (K) WW / NW / CW
- Tunable/Dimmable No
- Beam Angle 120°
- CRI (Ra) >80
- Material Polycarbonate / Aluminium Die-casting
- Body Color WH / BK
- Reflector N/A



Tile



TECHNICAL SPECIFICATIONS

• Wattage	24W / 30W / 40W / 50W
• Dimension	300 mm / 300 mm / 595 mm / 595 mm
• Cut Out	285mm / 285 mm / 575 mm / 575 mm
• CCT (K)	WW / NW / CW
• Tunable/Dimmable	N/A
• Beam Angle	120°
• CRI (Ra)	>80
• Material	Aluminium Die-casting
• Body Color	WH
• Reflector	N/A

Strip

TECHNICAL SPECIFICATIONS

• Wattage	12V / 24V
• PCB Width	10MM
• Roll Length	5M
• CCT (K)	WW / NW / CW
• Tunable/Dimmable	N/A
• Beam Angle	120°
• CRI (Ra)	>80
• Material	Pure copper
• Body Color	N/A
• LED /m	240



SMPS



TECHNICAL SPECIFICATIONS

• Wattage	12V / 24V
• Ampere	3A / 5A / 10A / 16.7A / 25A
• Roll length	N/A
• CCT (K)	N/A
• Tunable/Dimmable	N/A
• Beam Angle	N/A
• CRI (Ra)	N/A
• Material	Aluminium Die-casting
• Body Color	N/A
• Reflector	N/A

Rope Light

TECHNICAL SPECIFICATIONS

• Wattage	~9W/MTR
• Dimension	11 mm PVC
• Roll Length	50 Metre
• CCT (K)	WW / NW / CW / BLUE / GREEN / RED / AMBER / PINK / ICE BLUE / MULTI
• Tunable/Dimmable	N/A
• Beam Angle	120°
• CRI (Ra)	>80
• Material	PVC
• LED / m	120



Profile

TECHNICAL SPECIFICATIONS

- Variants CONCEALED / SURFACE / CORNER / ROUND
- Dimension 1M / 2M / CUSTOM
- Cut Out 17mm | 12 mm
- Material Aluminium / Silicon
- Body Color Aluminium Finish / Black / White
- Reflector N/A



Magnetic

TECHNICAL SPECIFICATIONS

- Variants SURFACE / CONCEALED
- Dimension 5MM / 10MM / 16MM / 25MM SERIES
- Track 1M / 2M / 3M POP & SF
- CCT (K) WW / NW / CW
- Power Supply 100W / 200W
- Track Dimension L-1000 x W-26 x H-21 / L-2000 x W-26 x H-21 / L-3000 x W-26 x H-21
- CRI (Ra) >80
- Material Aluminium Die-casting
- Body Color Black / White
- Fixtures Linear / Profile / Track/ Pendant / Mini Rd/ Sq / Corner / Hose



Linear



TECHNICAL SPECIFICATIONS

- Wattage 20W / 30W / 40W / 50W / 70W / 100W
- Dimension 2ft / 3ft / 4ft / 6ft / 8 Ft
- CCT (K) WW / NW / CW / 3 in 1
- Shapes As Per Choice
- Link Linkable
- CRI (Ra) >80
- Material Aluminium Die-casting
- Body Color Black

K-Type



TECHNICAL SPECIFICATIONS

- Wattage 3W / 6W
- Dimension 75×75×35 mm / 145×75×60 mm
- Cut Out N/A
- CCT (K) WW
- Tunable/Dimmable No
- Beam Angle 120°
- CRI (Ra) N/A
- Material Aluminium Die-casting
- Body Color Black
- IP Rating IP65

Ball Light



TECHNICAL SPECIFICATIONS

- Wattage 2W/ 4W
- Dimension 65×65×55 mm / 74×74×44 mm
- Cut Out N/A
- CCT (K) WW / Auto RGBP
- Tunable/Dimmable No
- Beam Angle N/A
- CRI (Ra) >80
- Material Aluminium Die-casting / Polycarbonate
- Body Color Black
- IP Rating IP65

Curve Wall

TECHNICAL SPECIFICATIONS

- Wattage 2W / 4 W / 6 W
- Dimension 75×87×38 mm / 90×104×43 mm / 88×161×43 mm
- Cut Out N/A
- CCT (K) WW
- Tunable/Dimmable No
- Beam Angle 120°
- CRI (Ra) >80
- Material Aluminium Die-casting / Polycarbonate
- Body Color Black
- IP Rating IP65



Casette

TECHNICAL SPECIFICATIONS

- Wattage 6W / 12W
- Dimension 160*100*25 mm
- Cut Out N/A
- CCT (K) WW
- Tunable/Dimmable No
- Beam Angle 120°
- CRI (Ra) >80
- Material Die Cast Aluminium
- Body Color Black
- IP Rating IP65



Updown Wall

TECHNICAL SPECIFICATIONS

- Wattage 6W / 12W
- Dimension 80*65*75mm / 155*65*75mm
- Cut Out N/A
- CCT (K) WW
- Tunable/Dimmable No
- Beam Angle 120°
- CRI (Ra) >80
- Material Aluminium Die-casting
- Body Color Black
- IP Rating IP65



Rubik Square



TECHNICAL SPECIFICATIONS

• Wattage	6W
• Dimension	110*110*85mm
• Cut Out	N/A
• CCT (K)	WW
• Tunable/Dimmable	No
• Beam Angle	120°
• CRI (Ra)	>80
• Material	Acrylic
• Body Color	Black
• IP Rating	IP65

Foot Lights

TECHNICAL SPECIFICATIONS

• Variants	2M / 4M
• Dimension	85×85 mm
• Fixture	Wall Concealed / Surface
• CCT (K)	WW
• Tunable/Dimmable	No
• Beam Angle	120°
• CRI (Ra)	>80
• Material	Aluminium Die-casting
• Body Color	Black/White
• Reflector	N/A



Spike



TECHNICAL SPECIFICATIONS

- Wattage 7W / 12W
- Dimension 50×70 mm / 70×80 mm
- Cut Out N/A
- CCT (K) WW / WH / GREEN / RED / AMBER
- Tunable/Dimmable No
- Beam Angle Wide / Narrow
- CRI (Ra) >80
- Material Aluminium Die-casting
- Body Color Black
- Reflector N/A

Wall Washer

TECHNICAL SPECIFICATIONS

- Wattage 18W / 24W / 36W / 72W
- Dimension 50*55*500mm / 50*55*990mm
- Voltage 220V AC / 24V DC
- CCT (K) WW / AMBER / GREEN / RED
- Length 1 MTR / 0.5 MTR / CUSTOMISED
- Beam Angle 10°
- CRI (Ra) >80
- Material Aluminium Die-casting
- Body Color Black / Grey
- Rating IP 65



Inground

TECHNICAL SPECIFICATIONS



- Wattage 3W / 6W / 9W / 12W
- Dimension 65*65*75mm / 80*80*85mm
- Cut Out 32mm
- CCT (K) WW
- Tunable/Dimmable N/A
- Beam Angle 120°
- CRI (Ra) >80
- Material Aluminium Die-casting
- Body Color Silver Chrome
- Reflector N/A

Underwater

TECHNICAL SPECIFICATIONS

- Wattage 3W / 9W / 12W / 18W
- Dimension 85mm / 110mm / 135mm / 160mm
- Cut Out 60mm / 85mm / 110mm / 135mm
- CCT (K) WW / WH
- Tunable/Dimmable N/A
- Beam Angle 120°
- CRI (Ra) >80
- Material Aluminium Die-casting
- Body Color Silver Chrome
- Reflector N/A



GM Flood



TECHNICAL SPECIFICATIONS

- Wattage 30W / 50W / 100W / 200W
- Dimension 185×180×50 mm / 227×218×55 mm / 260×250×70 mm / 318×308×75 mm
- Surge Protection 4Kv & 6Kv
- CCT (K) 6500K
- Tunable/Dimmable N/A
- CRI (Ra) >80
- Material Aluminium Die-casting
- Body Color Grey
- IP Rating IP66
- Driver Yes

Slim Flood

TECHNICAL SPECIFICATIONS

- Wattage 50W / 100W / 200W
- Dimension 230*155 mm / 275*185 mm
- Surge Protection 4Kv & 6Kv
- CCT (K) 3000K/ 6500K
- Tunable/Dimmable No
- CRI (Ra) >80
- Material Aluminium Die-casting
- Body Color Grey
- IP Rating IP66
- Driver DOB



Hi-Bay



TECHNICAL SPECIFICATIONS

- Wattage 100W / 150W / 200W
- Dimension 315 × 145 × 175 mm / 315 × 145 × 175 mm / 377 × 145 × 260 mm
- Cut Out N/A
- CCT (K) 6500k
- Tunable/Dimmable N/A
- CRI (Ra) >80
- Material Aluminium Die-casting
- Body Color Matt Grey
- IP Rating IP66

Leaf Street

TECHNICAL SPECIFICATIONS

- Wattage 24W / 36W / 50W
- Dimension 275×120×55 mm / 315×135×55 mm / 360×170×55 mm
- Cut Out N/A
- CCT (K) 6500K
- Tunable/Dimmable No
- CRI (Ra) >80
- Material Aluminium Die-casting
- Body Color Grey
- IP Rating IP66



Solar Street



TECHNICAL SPECIFICATIONS

- Wattage 70W / 120W
- Dimension 415mm X 238mm X 47mm
/ 505mm X 238mm X 47mm
- Efficiency 60Lm/W $\pm$ 10%
- CCT (K) 6500K
- Tunable/Dimmable No
- Lifecycle > 8 Years
- Material ABS
- Body Color Black
- IP Rating IP66
- Solar Panel Power 8W/5V
- Battery Capacity 5000mAh
- Charge Voltage Range 2.9V to 4.2V

Aura Max

TECHNICAL SPECIFICATIONS

- Wattage 24W
- Dimension 258 $\times$ 258 $\times$ 267 mm
- Cut Out N/A
- CCT (K) WW
- Tunable/Dimmable N/A
- CRI (Ra) >80
- Material Polycarbonate
- Body Color Black
- Reflector N/A



Vista

TECHNICAL SPECIFICATIONS



- Wattage 20W
- Dimension 290 x 138 x 270 mm
- Cut Out N/A
- CCT (K) WW
- Tunable/Dimmable No
- CRI (Ra) >80
- Material Polycarbonate
- Body Color Grey
- Reflector N/A

Cubex

TECHNICAL SPECIFICATIONS

- Wattage 20W
- Dimension 150x150*150 mm
- Cut Out N/A
- CCT (K) WW
- Tunable/Dimmable No
- CRI (Ra) >80
- Material Polycarbonate
- Body Color Black
- Reflector N/A



Cube



TECHNICAL SPECIFICATIONS

- Wattage 20W
- Dimension 151 x 151 x 145 mm
- Cut Out N/A
- CCT (K) WW
- Tunable/Dimmable No
- CRI (Ra) >80
- Material Polycarbonate
- Body Color Black
- Reflector N/A

Mashal

TECHNICAL SPECIFICATIONS

- Wattage Holder Based (No LED)
- Dimension 315x145x45 mm
- Cut Out N/A
- CCT (K) As per LED bulb
- Tunable/Dimmable No
- CRI (Ra) N/A
- Material Polycarbonate
- Body Color Grey
- Reflector N/A



Freedom



TECHNICAL SPECIFICATIONS

• Wattage	20W
• Dimension	275×120×55 mm
• Cut Out	N/A
• CCT (K)	3000k / 6500k
• Tunable/Dimmable	No
• CRI (Ra)	>80
• Material	Polycarbonate
• Body Color	Black
• Reflector	N/A

Rubik

TECHNICAL SPECIFICATIONS

• Wattage	12W
• Dimension	130*130*120mm
• Cut Out	N/A
• CCT (K)	3000k / 6500k
• Tunable/Dimmable	No
• CRI (Ra)	>80
• Material	Aluminium with PC Diffuser
• Body Color	Black
• Reflector	N/A



Temple



TECHNICAL SPECIFICATIONS

- Wattage 15W
- Dimension 200MM / 300MM
- Cut Out 3000k / 6500k
- CCT (K) N/A
- Tunable/Dimmable N/A
- CRI (Ra) >80
- Material Aluminium Die-casting
- Body Color Grey
- Reflector N/A

Legacy

TECHNICAL SPECIFICATIONS

- Wattage 15W
- Dimension 200MM / 300MM
- Cut Out 3000k / 6500k
- CCT (K) N/A
- Tunable/Dimmable N/A
- CRI (Ra) >80
- Material Aluminium Die-casting
- Body Color Grey
- Reflector N/A



Four Pillar



TECHNICAL SPECIFICATIONS

- Wattage 15W
- Dimension 300 mm / 600 mm / 900 mm
- Cut Out N/A
- CCT (K) 3000k / 6500k
- Tunable/Dimmable N/A
- CRI (Ra) >80
- Material Aluminium Die-casting
- Body Color Grey
- Reflector N/A

Square

TECHNICAL SPECIFICATIONS

- Wattage 15W
- Dimension 300 mm / 600 mm / 900 mm
- Cut Out N/A
- CCT (K) 3000k / 6500k
- Tunable/Dimmable N/A
- CRI (Ra) >80
- Material Aluminium Die-casting
- Body Color Grey
- Reflector N/A



Ring

TECHNICAL SPECIFICATIONS

- Wattage 15W
- Dimension 300 mm / 600 mm / 900 mm
- Cut Out N/A
- CCT (K) 3000k / 6500k
- Tunable/Dimmable N/A
- CRI (Ra) >80
- Material Aluminium Die-casting
- Body Color Grey
- Reflector N/A



Round

TECHNICAL SPECIFICATIONS

- Wattage 15W
- Dimension 300 mm / 600 mm / 900 mm
- Cut Out N/A
- CCT (K) 3000k / 6500k
- Tunable/Dimmable N/A
- CRI (Ra) >80
- Material Aluminium Die-casting
- Body Color Grey
- Reflector N/A



SMART LIGHTING. BETTER LIVING.

WWW.GLARONINDIA.COM

@GLARONINDIA



TUNABLE
2700K - 6500K



DIMMABLE
0% - 100%

Smooth Dimming,
Perfect Ambience.



SMART CONTROL

APP | REMOTE

Control at Your Fingertips.



INTELLIGENT CONTROL. INFINITE POSSIBILITIES.

ONE LIGHT. EVERY MOOD.



FOCUS
Cool White
For Productivity



RELAX
Neutral White
For Balance



UNWIND
Warm White
For Comfort



HIGH CRI
True Colors
Ra >80



ENERGY EFFICIENT
Lower Power
More Savings



RELIABLE & SAFE
Surge Protection
Built to Last



THANK YOU

FOR EXPLORING OUR COLLECTION



INDUSTRIAL
LIGHTING



RESIDENTIAL
LIGHTING



COMMERCIAL
LIGHTING

PREMIUM LIGHTING.
ENDLESS POSSIBILITIES.

LET'S CONNECT



+918955469562



glaronindia@gmail.com



www.glaronindia.com